


BURNER DESIGNATION	A	D $\phi$	dm $\phi$	R $\alpha$
6SSO	30	10.5	2	1/8
8SSO	35	13.8	4	1/4
10SSO	40	17.3	5	3/8
15SSO	60	21.7	8	1/2
20SSO	65	27.2	10	3/4
25SSO	75	34	14	1

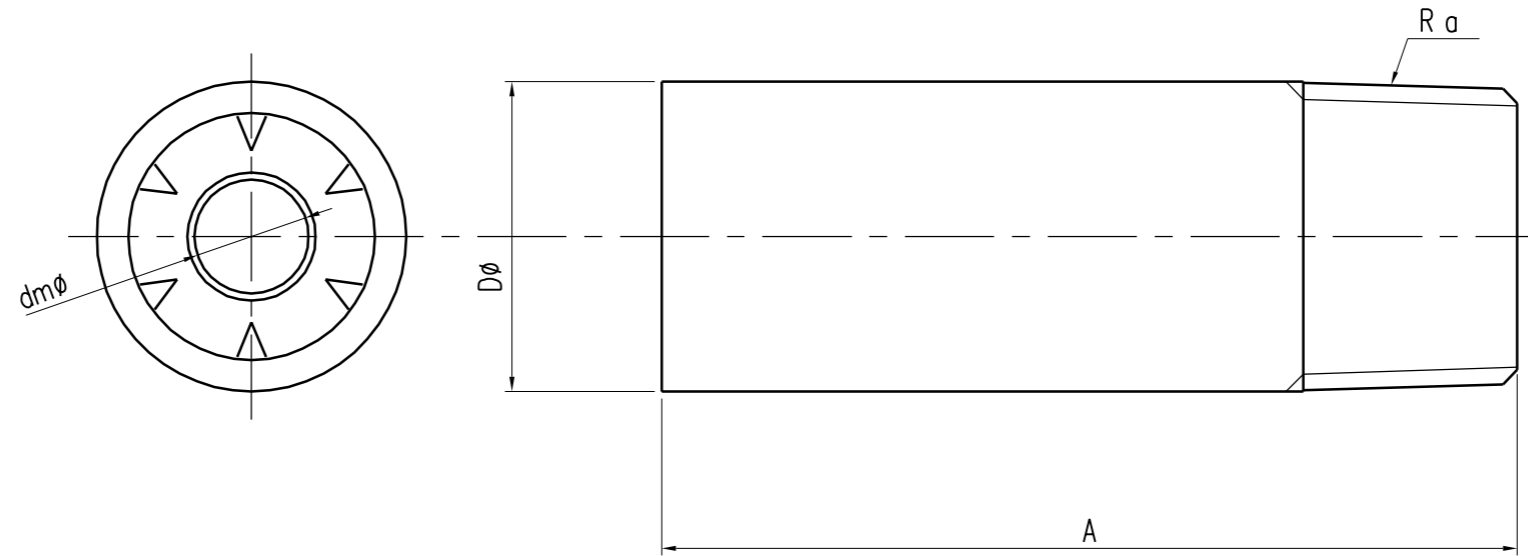


SWIRL PILOTED STICK-TIGHT BURNER (SSO)

EXTERNAL DIMENSION

 **TAKAMITSU Co.,Ltd.**

BURNER DESIGNATION	A	D $\phi$	dm $\phi$	Rc X
10SS	35	35	6.5	3/8
15SS	41	40	8.5	1/2
20SS	45	50	12	3/4
25SS	50	55	14	1
40SS	70	70	26	1 1/2

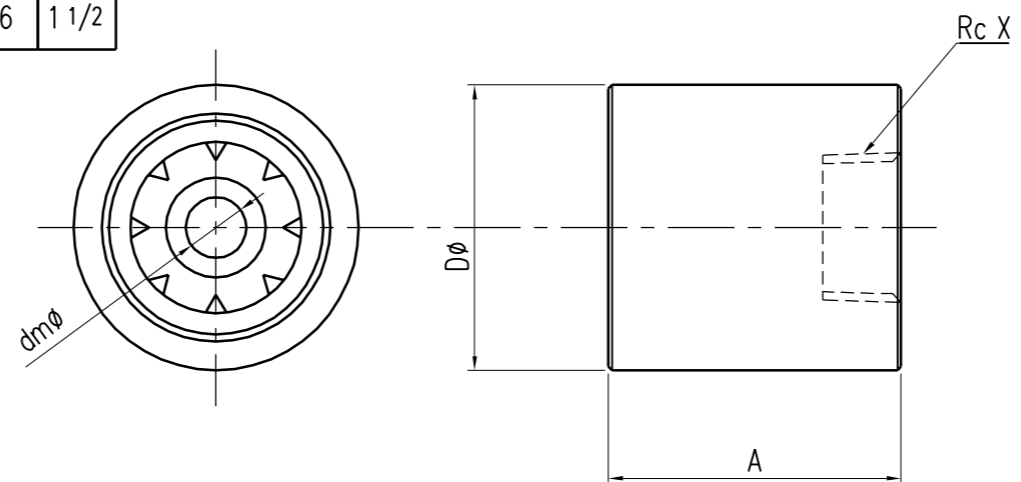

SWIRL PILOTED STICK-TIGHT BURNER (SS)

EXTERNAL DIMENSION

 **TAKAMITSU Co.,Ltd.**